


## Antivibration mounts

Cylindrical mounts: A, B, C, D, E, K, KP, W, VT etc.


All types are available as galvanized, and all cylindrical types are also available in stainless steel.




### RA, RAEM & HGF mounts

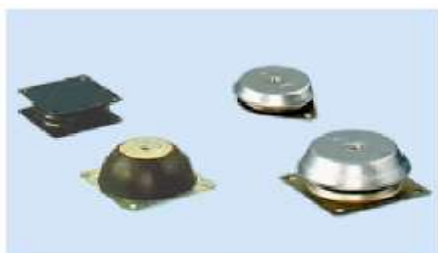

### SAW-mounts for crushers & sieves

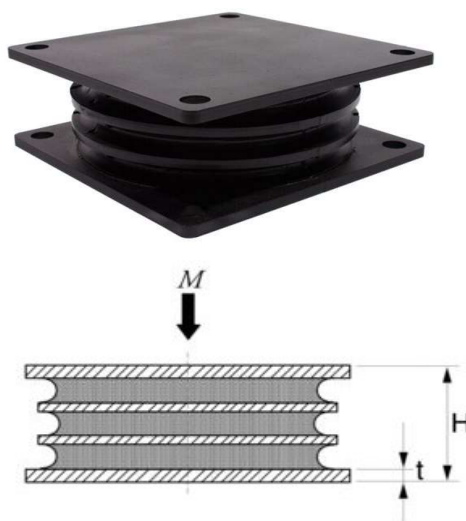

### NoVibra-mat in 45 & 70 ShA. 8 & 10 mm / 0,5x0,5 & 1,0x1,0m / piece

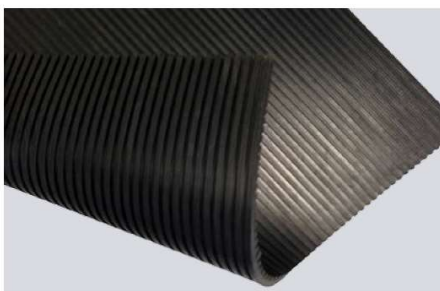

#### Rubber matting

##### NoVibraMat

Finish: both sides ribbed (block) at an angle of 90°  
 Temperature range: -20° to +80°C

**Features:** lightly oil-resistant • Appropriately wear-resistant and non slip

**Application:** vibration-damping mat • Sound isolation of devices and machines  
 • Ensures a more stable position of the machine